


NOTES

1. REMOVE AND REPLACE ROADWAY BASE SHALL CONSIST OF THE REMOVAL OF UNSUITABLE ROADWAY BASE MATERIAL OF WHATEVER NATURE ENCOUNTERED TO A DEPTH OF AT LEAST 10" UNCOVERED AFTER MILLING OR VISIBLE PRIOR TO MILLING OR RESURFACING AND THE INSTALLATION OF AT LEAST 4" HOT MIX ASPHALT BASE COURSE AND 6" DGA.. THE PERIMETER OF THE REPAIR SHALL BE SAWCUT.
2. THE FOLLOWING ITEMS OF WORK ARE INCLUDED UNDER REMOVE AND REPLACE ROADWAY BASE:
 - SAWCUT
 - HOT MIX ASPHALT BASE COURSE
 - DGA
 - ROADWAY EXCAVATION, UNCLASSIFIED



FULL DEPTH REPAIR
N.T.S.

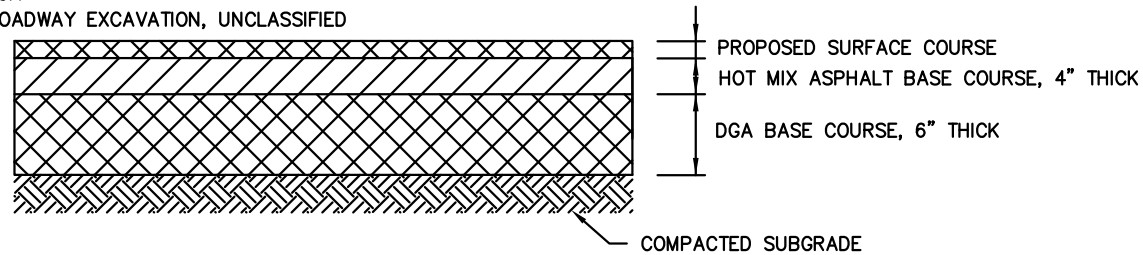

ROAD REPAIR DETAIL

CITY OF SUMMIT UNION CO., N.J.
DIVISION OF ENGINEERING

DATE:
10/1/2011